

Applications


-Overvoltage and undervoltage protection for household equipment.

Feature

- Supply voltage measurement and protection.
- Double bus wiring design stronger ability.
- Self reset after fault.
- Relay status is indicated by LED.
- 1-MODULE,DIN rail mounting.



Model and connotation

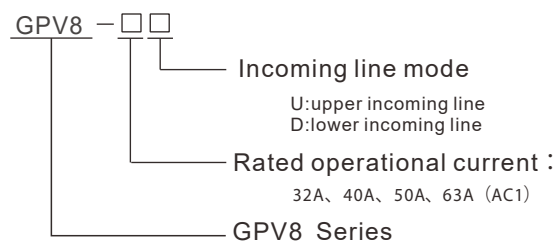


Note:4P products such as the need to phase protection function can be customized.


Technical parameters

	2P	4P
Rated supply voltage	AC220V	AC220V(L-N)
Rated supply frequency	50/60 Hz	
Rated operational current	32A、40A、50A、63A (AC1)	
Burden	AC max.3VA	
Over voltage operation value	265V	265V (L-N)
Over voltage reset value	257V	257V(L-N)
Under voltage operation value	175V	175V(L-N)
Under voltage reset value	180V	180V(L-N)
Action delay time	1s	
Power- up delay	2s	
Reset time	30s	
Measurement error	≤1%	
Operating temperature	-20 to +55 (- 4 to 131)	
Storage temperature	-35 to +75 (- 22 to 158)	
Mounting/DIN rail	Din rail EN/IEC 60715	
Protection degree	IP40 for front panel/IP20 terminals	
Operating position	any	
Overvoltage category	III.	
Pollution degree	2	
Dimensions	82× 36× 68mm	82× 72× 68mm
Weight	120g	250g


Wiring Diagram

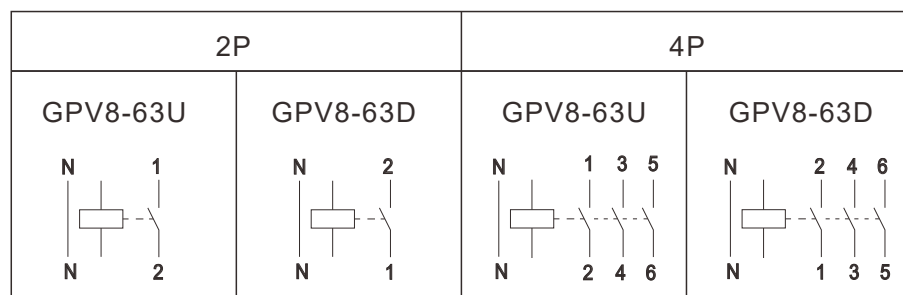

Functions Diagram

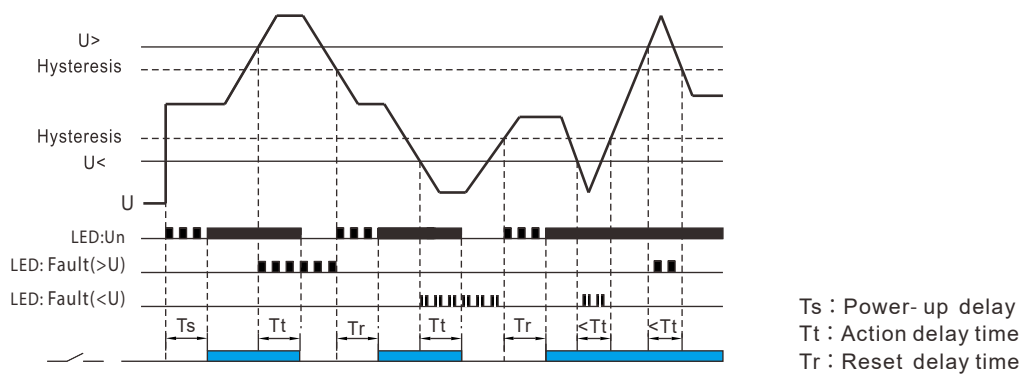

Dimensions(mm)

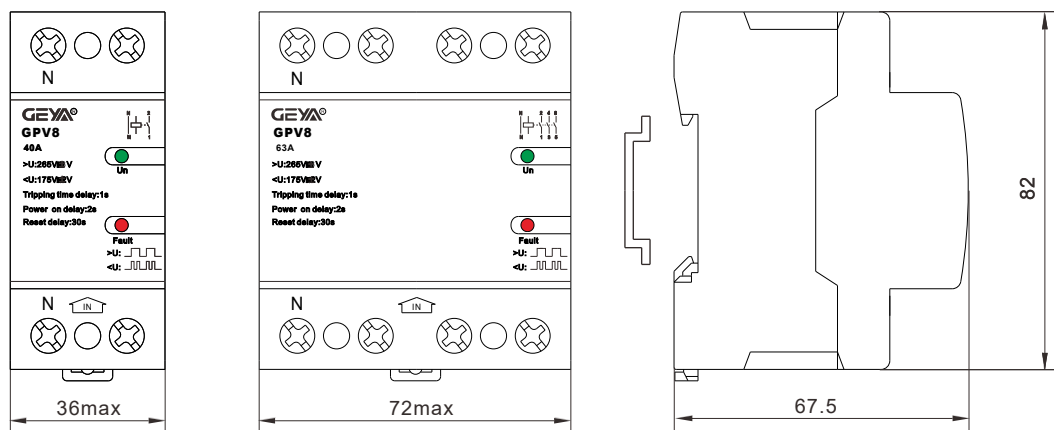

Example

